



REVENT ONE26/S/G/

Round Single Rack Gas Oven

Max pan size:
1 single rack (18"x26")
Gas/electric models



FEATURES

Baking quality

- > Bakes everything without adjustments.
- > New revolutionizing RTCC (Round Total Convection Control) system ensuring:
 - Minimized weight loss
 - Even bake
 - Perfectly even coloured products
 - Maximized bread volume
- > New light weight RHVS (Round High Volume Steam) system easy to clean and ensuring:
 - Excellent texture
 - Excellent crust

Total Cost of Ownership

- > Perfect bake without rejects.
- > Reduced equipment footprint opens up new possibilities for small spaces.
- > The oven is designed for 24/7 production based on the experience from our earlier 700 series.
- > Most flexible choice for a diversified bakery assortment.
- > Easy to use with self-instructive and angled GIAC touch control panel.
- > Sliding door easy to handle and reducing risk for burn injuries.
- > Multiple-alarm system allowing for up to four different products to be baked at once.
- > World leading energy efficiency through:
 - Round baking chamber minimizing heated air volume
 - New patented Revent Heat Exchanger and modulating burner with high efficiency (89,5%) according to DIN 8766
 - Energy save mode
 - New High Tech Insulation

- > Minimized service cost.
- > The oven is manufactured in sections, making it easy to install and move through standard door openings. You will be "up and baking" the same day.

Sanitary


Stainless steel.
Non corrosive steam system.

Options

- > Rack lifts for most types of racks including A-lift, B-lift, Baxter lift, C-lift, D-lift, Lucks lift, F-lift
- > Platform
- > GIAC Extended PC Software



In Bread We Trust

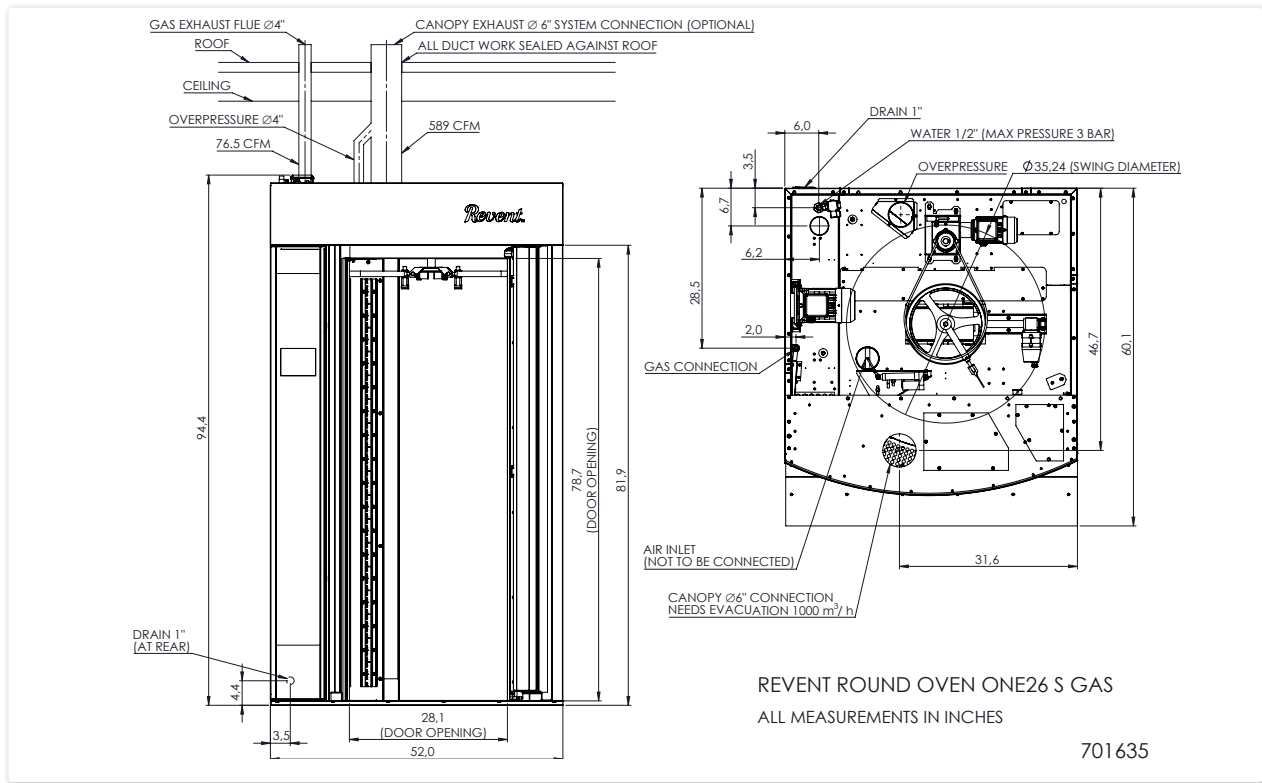

701635

Specifications

Maximum Heat Capacity	170,000 btuh
Temperature range	95-572°F
Total shipping weight	1980 lbs*
Standard shipping	Ships assembled in one piece, crated.
Minimum intake opening	52"x57" (one-piece shipment without skid)
Minimum intake opening	45"x52" with Heat section and bake chamber separated
Minimum section tilt up height and recommended service height:	100"
Swing diameter	35.2"
Max load of racklift and platform	441 lbs
Steam Generation	0.8 gals/20 sec at 482°F

*Final shipping weights will depend on the final order specifications. Continuous product development is a Revent policy. Therefore, we reserve the right to change specifications and/or design without prior notice. Pictures or drawings may include product options.

Utility requirements

Electrical	
Standard	3PH208-220V+N 9A
Optional	3PH440-480V 6A +1PH/120V/60 Hz 15A
	Contact factory for other power options
Gas	
Natural Gas and Liquid propane	170,000 btuh @ 7-14" w.c ¾" drop to ½" NPT
Water and Drain	
Water Supply	½"NPT ø 35-45 PSI, cold
Drain	1" NPT
Water quality	pH 7-8.5 Hardness 4-7 gr/gals. Acceptable range for chloride concentration 0-50 ppm

Ventilation
Direct Venting:
Combustion flue:
 4" connection. Draft diverter included. Ducting and fan to be provided by customer per local and state codes. Draft of 76 cfm is required (-0.3" to -0.15" w.c)

Canopy vent:
 6" connection. 589 cfm evacuation. Ducting and fan to be provided by customer.

Venting via external exhaust hood:
 Oven installed under an exhaust hood designed to vent by products of combustion and steam and vapor from the oven. Type of products baked and local code dictates if the exhaust hood should be a Type II (normal baking) or Type I (grease laden vapor) exhaust hood. Exhaust hood must be interlocked with oven.

Installation requirements

The oven must be installed on a levelled non-combustible surface. The oven may be installed flush against a wall. Only the front and top need to be left open for access. The space on top of the oven must be well ventilated and the temperature must not exceed 120°F. This is to avoid damage to electric components.

Revent is ISO 9001 certified.

Revent sales representative:



Revent Incorporated
 100 Ethel Road West, Piscataway, New Jersey 08854
 Phone (732) 777-9433, Fax (732) 777-1187
 Toll Free 800-822-9642
 E-mail info@revent.com, www.revent.com